



MAFELEC

Creating control and signalling solutions for harsh environments

Emergency Call Handles



Passenger safety

- **High Reliability**
- **Positive opening contacts**
- **Manual or remote-controlled re-setting**
- **Vandal resistant**
- **Light dimensions**



Standards:


- **Conception** IEC / EN 60947 & 60077 & 60571
- **Shocks, vibrations** IEC / EN 61373
- **Fire / smoke** NFF 16-101 & 102, EN 45545

Mechanical characteristics:

- Operating temperature: - 30°C to + 55°C
- Shock resistance: 5G in all directions
- Dimensions (depending on model)
- Built-in or projecting mounting (depending on model)

Electrical characteristics:

- The characteristics of our devices are defined according to customer specifications and can vary according to the chosen model. (Contact us)

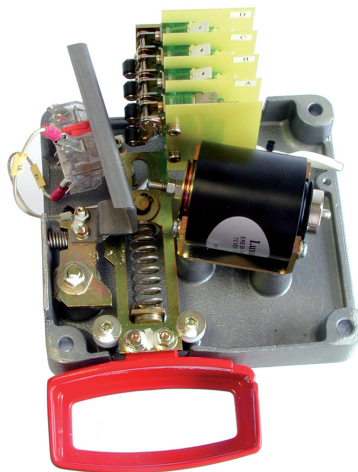

AEROSPACE & DEFENCE



COACHES & BUSES



RAILWAY



INDUSTRY



ENERGY



PLEASURE BOAT



VERTICAL TRANSPORT



INDUSTRIAL VEHICLES



OFFSHORE & MINING

MAFELEC
www.mafelec.com

Textes et images non contractuels

(update 2017/06)